

RECEIVER


RF-level	SQ-value	RSSI-value	SINAD	S-units	S-units
dBm	A/D 0...255	A/D 0...255	dB	6 dB/S	3 dB/S
-137				1	1
-136				1	1
-135				1	1
-134				1	1
-133		26		1	1
-132		27		1	1
-131		27		1	1
-130		28		1	1
-129		28		1	1
-128		29		1	1
-127		30		1	1
-126	73	31	4	1	1
-125	77	32	5,1	1	1
-124	79	34	6,1	1	1
-123	85	36	7	1	1
-122	88	38	8,5	2	1
-121	93	40	10,2	2	2
-120	97	43	13,1	2	2
-119	104	45	15,7	2	2
-118	110	48	18,5	2	3
-117	120	50	21,5	2	3
-116	126	53	23,3	3	3
-115	130	56	25	3	4
-114	136	58	26,4	3	4
-113	142	60	27,1	3	4
-112	146	63	28,1	3	5
-111	151	65	29,2	3	5
-110	153	67	29,8	4	5
-109	155	69	30,7	4	6
-108	158	71	31,4	4	6
-107	159	74	32,1	4	6
-106	161	76	32,7	4	7
-105	162	78	33,3	4	7
-104	164	81	33,8	5	7
-103	165	84	34,2	5	8
-102	166	87	34,6	5	8
-101	166	90	34,9	5	8
-100	167	93	35,1	5	9
-99		96	35,3	5	9
-98	169	99	35,4	6	9
-97		103	35,6	6	9
-96		106	35,7	6	9
-95		109		6	9
-94	169	112		6	9
-93		114		6	9
-92		118		7	9
-91		120		7	9
-90		123		7	9

S1
pip pip
pip pip pip
pi pi pi pi
S9


RECEIVER



RF-level	SQ-value	RSSI-value	S-units	S-units
dBm	A/D 0...255	A/D 0...255	6 dB/S	3 dB/S
-89		125	7	9
-88		127	7	9
-87		129	7	9
-86		131	8	9
-85		133	8	9
-84		135	8	9
-83		138	8	9
-82		140	8	9
-81		142	8	9
-80		144	9	9
-79		147	9	9
-78		150	9	9
-77		152	9	9
-76		154	9	9
-75		157	9	9
-74		159	9	9
-73		161	9	9
-72		162	9	9
-71		164	9	9
-70		166	9	9
-69		168	9	9
-68		169	9	9
-67		171	9	9
-66		172	9	9
-65		174	9	9
-64		175	9	9
-63		177	9	9
-62		179	9	9
-61		181	9	9
-60		183	9	9
-59		186	9	9
-58		188	9	9
-57		191	9	9
-56		194	9	9
-55		198	9	9
-54		201	9	9
-53		204	9	9
-52		208	9	9
-51		211	9	9
-50		213	9	9
-49		216	9	9
-48		219	9	9
-47		221	9	9
-46		223	9	9
-45		224	9	9
-44		225	9	9
-43		226	9	9
-42		227	9	9
-41		228		

OH softa 3Zi BC58 receiver

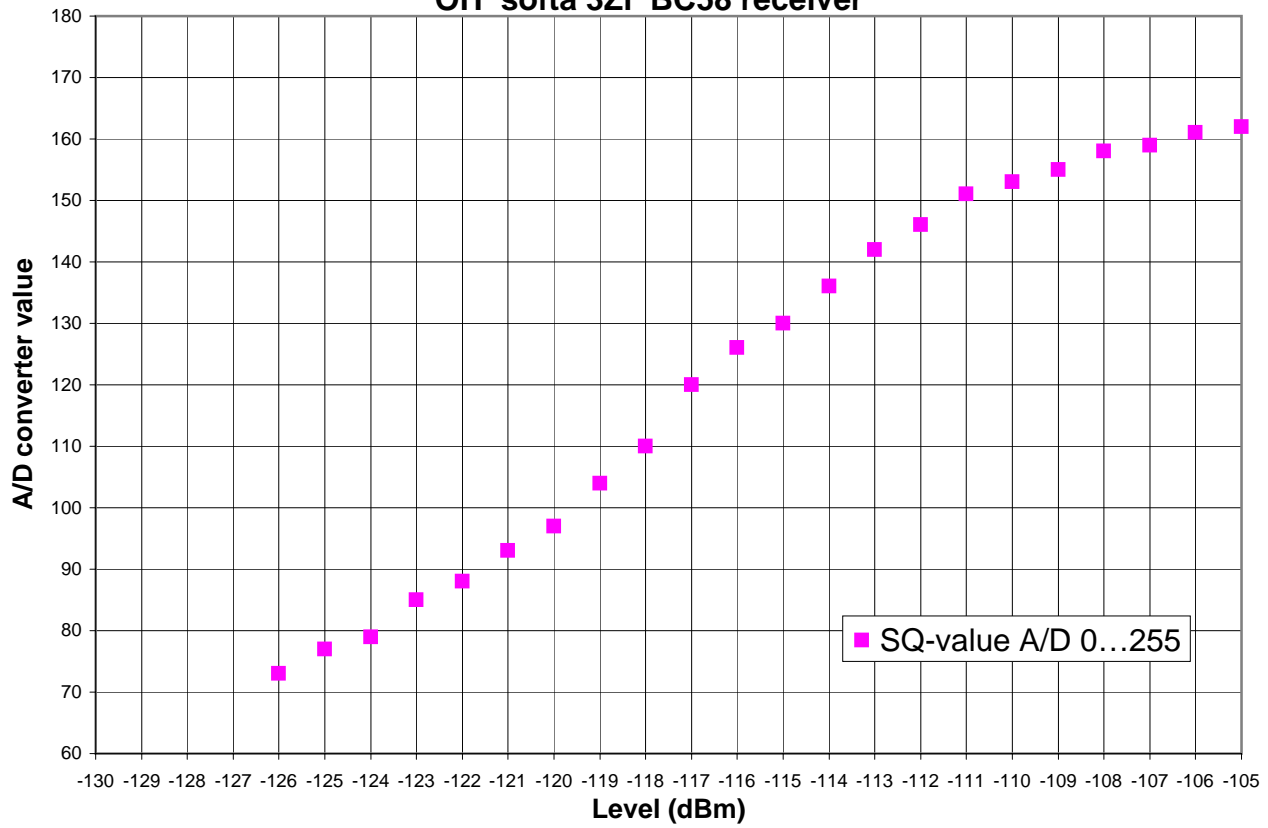

SQ value (A/D) SINAD (dB)

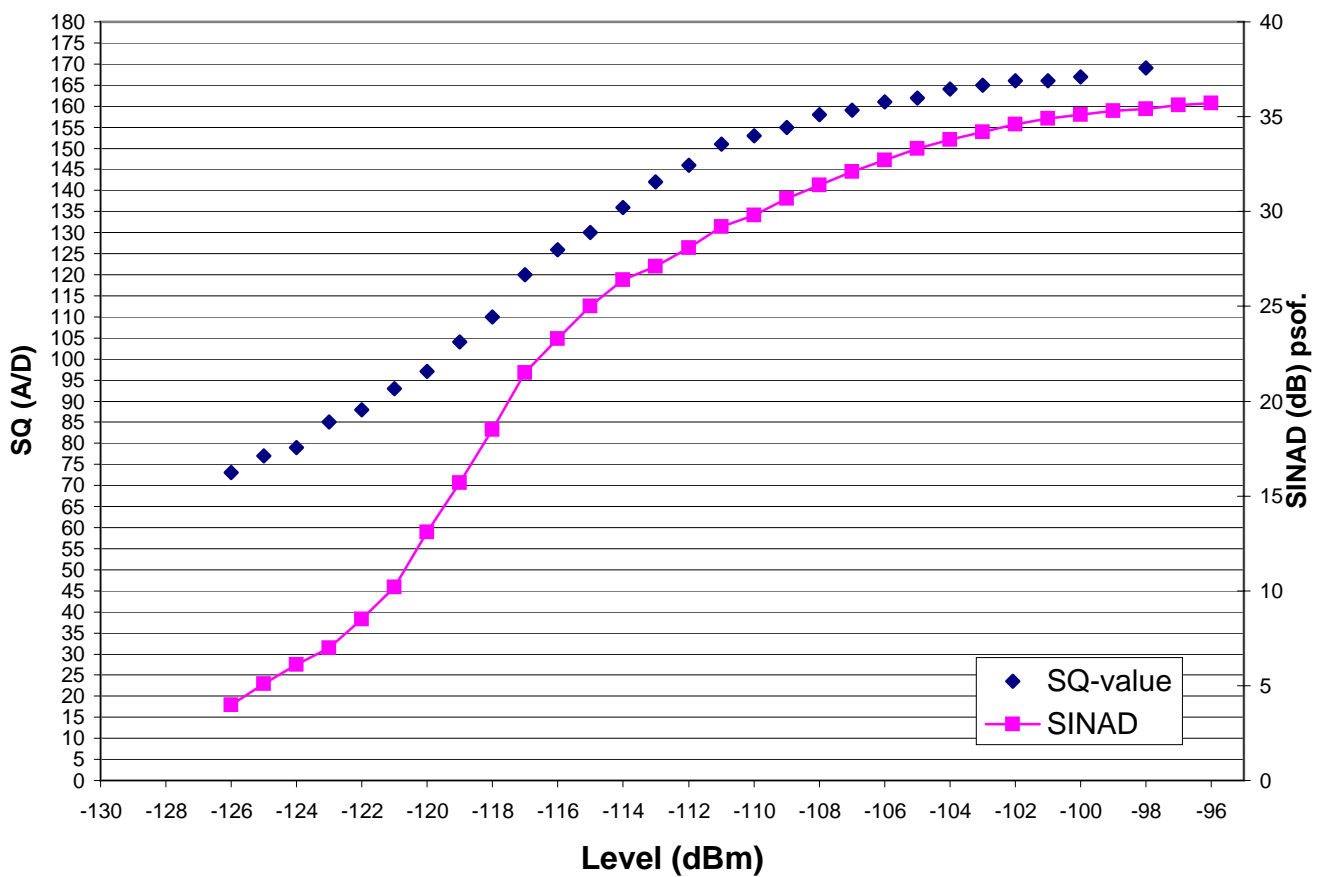

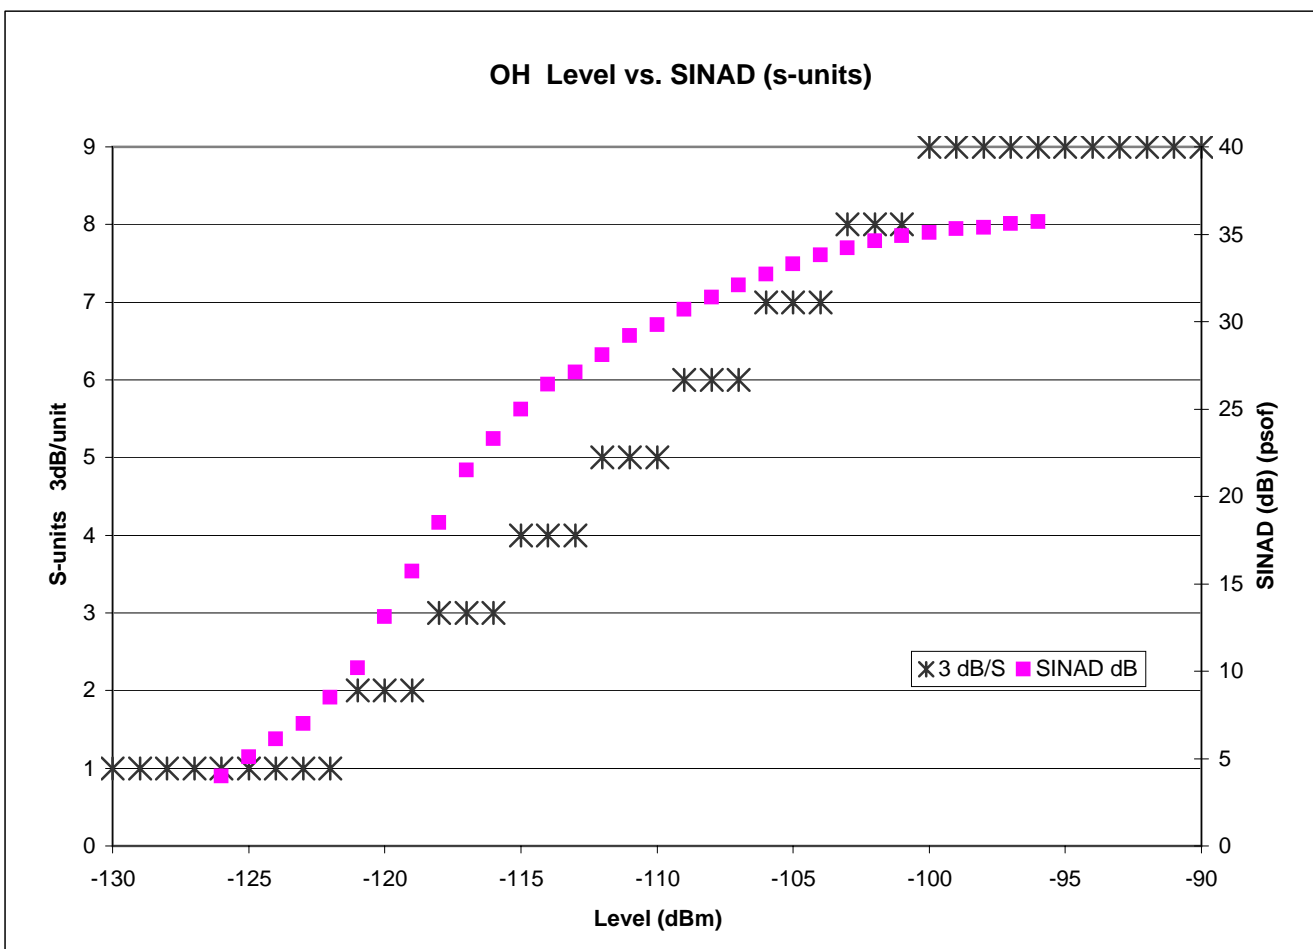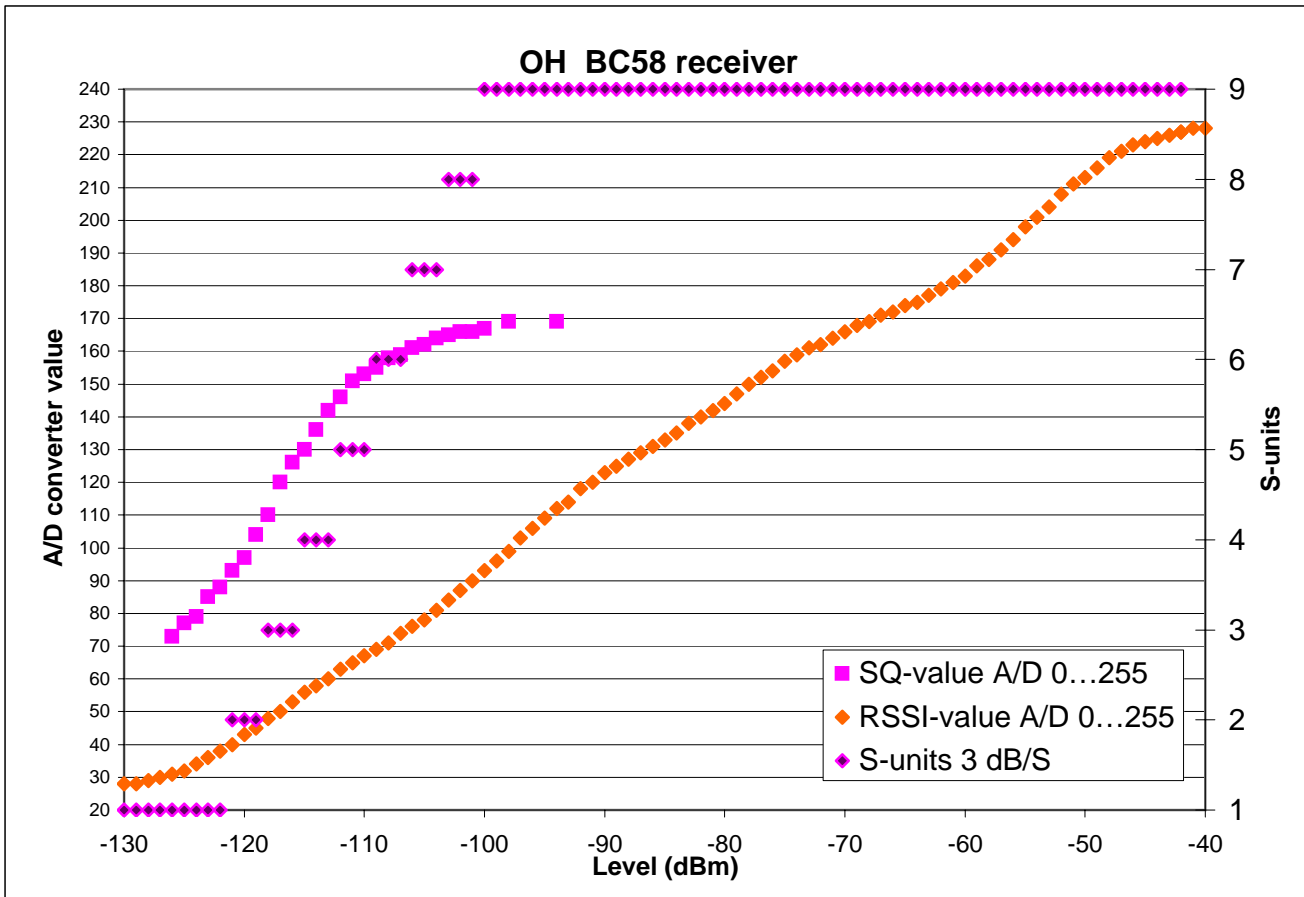

OH9RAR kommentteja 25.4.2007 Timo Toratti

UUSI SOFTA r58p8x3Zi.bin

ASETUS ARVO

use count 0
use hrs 0
RFC 70
TPC 100
lights 15
SQL 116
SQL bi 130
hyst 2
open 100
tail 100
open 15
hog 300
dead 0

0
blip 500
sql incr 20
tr incr 0
speed 140
pitch 1000
id hot ant bad
id ant pa hot
id hog cl
blip e
Remote 12
Passcode xxxxx
CCIR pref. 4321
Ant bad 45
PAhot 150

Locator
Lat 660700
Lon 244217

CALL ei asetettu
S1 RSSI 40
S9 RSSI 95

Blips morse
BrSSiS on
rssi1 40
BrSSiS1 i
rssi2 55
BrSSiS2 s
rssi3 75
BrSSiS3 h

CTCSS tekemäti
DTMF-kortti ompi
CCIR-ompi

AD_TP4 200

TRANSMITTER OH



DATE: 25.4.2007

TPC-value	Current	POWER	FWD-value	REF-value	TPC-value	Current	POWER	FWD-value	REF-value
A/D 0...255	Ampers	Watts	A/D 0...255	A/D 0...255	A/D 0...255	Ampers	Watts	A/D 0...255	A/D 0...255
0									
1					51				
2					52				
3					53				
4					54				
5					55				
6					56				
7					57				
8					58				
9					59				
10					60				
11					61				
12					62				
13					63				
14					64				
15					65				
16					66				
17					67				
18					68				
19					69				
20					70				
21					71				
22					72				
23					73				
24					74				
25					75				
26					76				
27					77				
28					78				
29					79				
30					80				
31					81				
32					82				
33					83				
34					84				
35					85				
36					86				
37					87				
38					88				
39					89				
40					90				
41					91				
42					92				
43					93				
44					94				
45					95				
46					96				
47					97				
48					98				
49					99				
50					100				

TRANSMITTER

TPC-value	Current	POWER	FWD-value	REF-value	TPC-value	Current	POWER	FWD-value	REF-value
A/D 0...255	Ampers	Watts	A/D 0...255	A/D 0...255	A/D 0...255	Ampers	Watts	A/D 0...255	A/D 0...255
101					151				
102					152				
103					153				
104					154				
105					155				
106					156				
107					157				
108					158				
109					159				
110					160				
111					161				
112					162				
113					163				
114					164				
115					165				
116					166				
117					167				
118					168				
119					169				
120					170				
121					171				
122					172				
123					173				
124					174				
125					175				
126					176				
127					177				
128					178				
129					179				
130					180				
131					181				
132					182				
133					183				
134					184				
135					185				
136					186				
137					187				
138					188				
139					189				
140					190				
141					191				
142					192				
143					193				
144					194				
145					195				
146					196				
147					197				
148					198				
149					199				
150					200				

TRANSMITTER

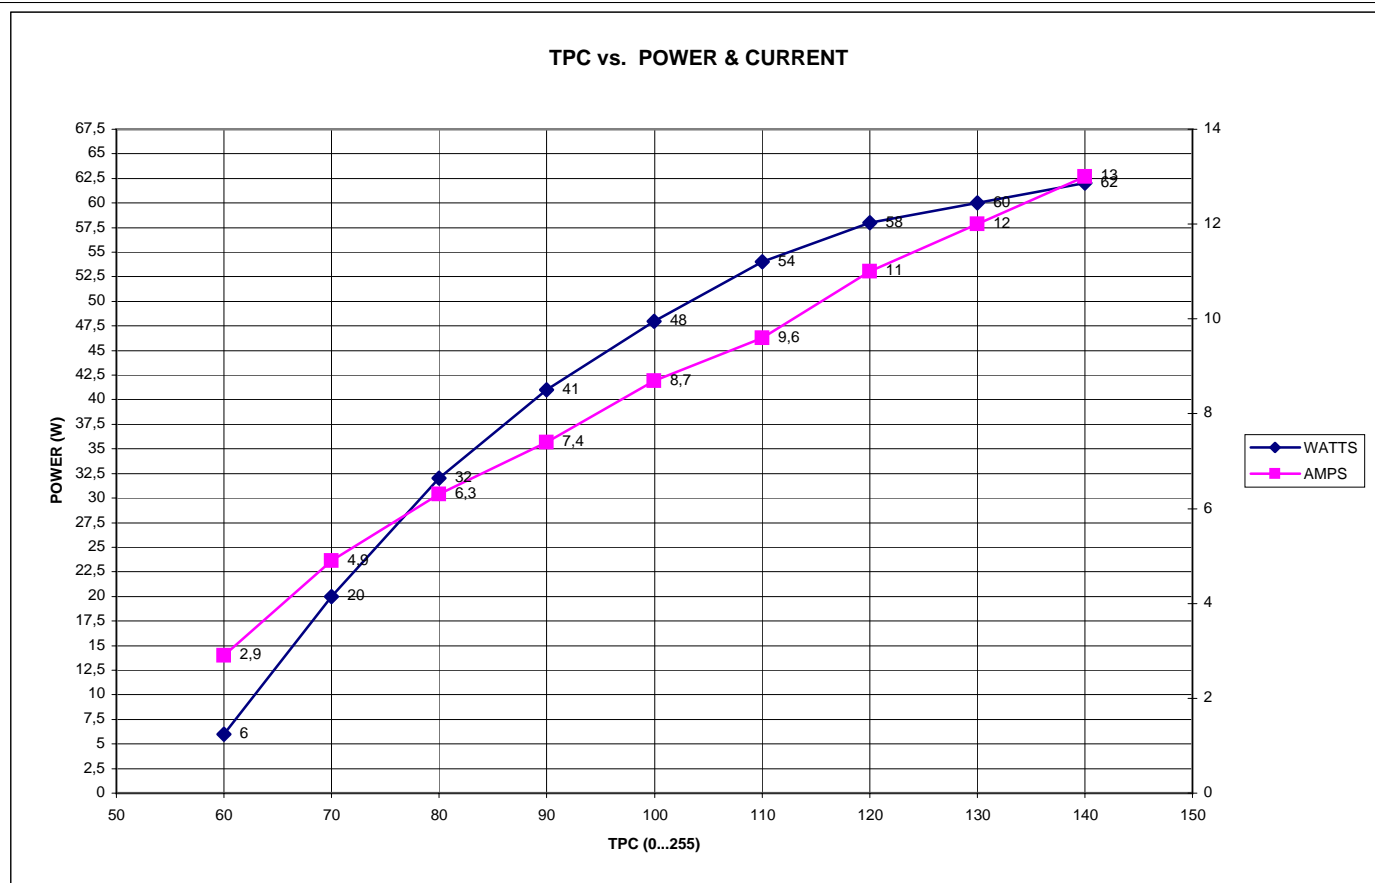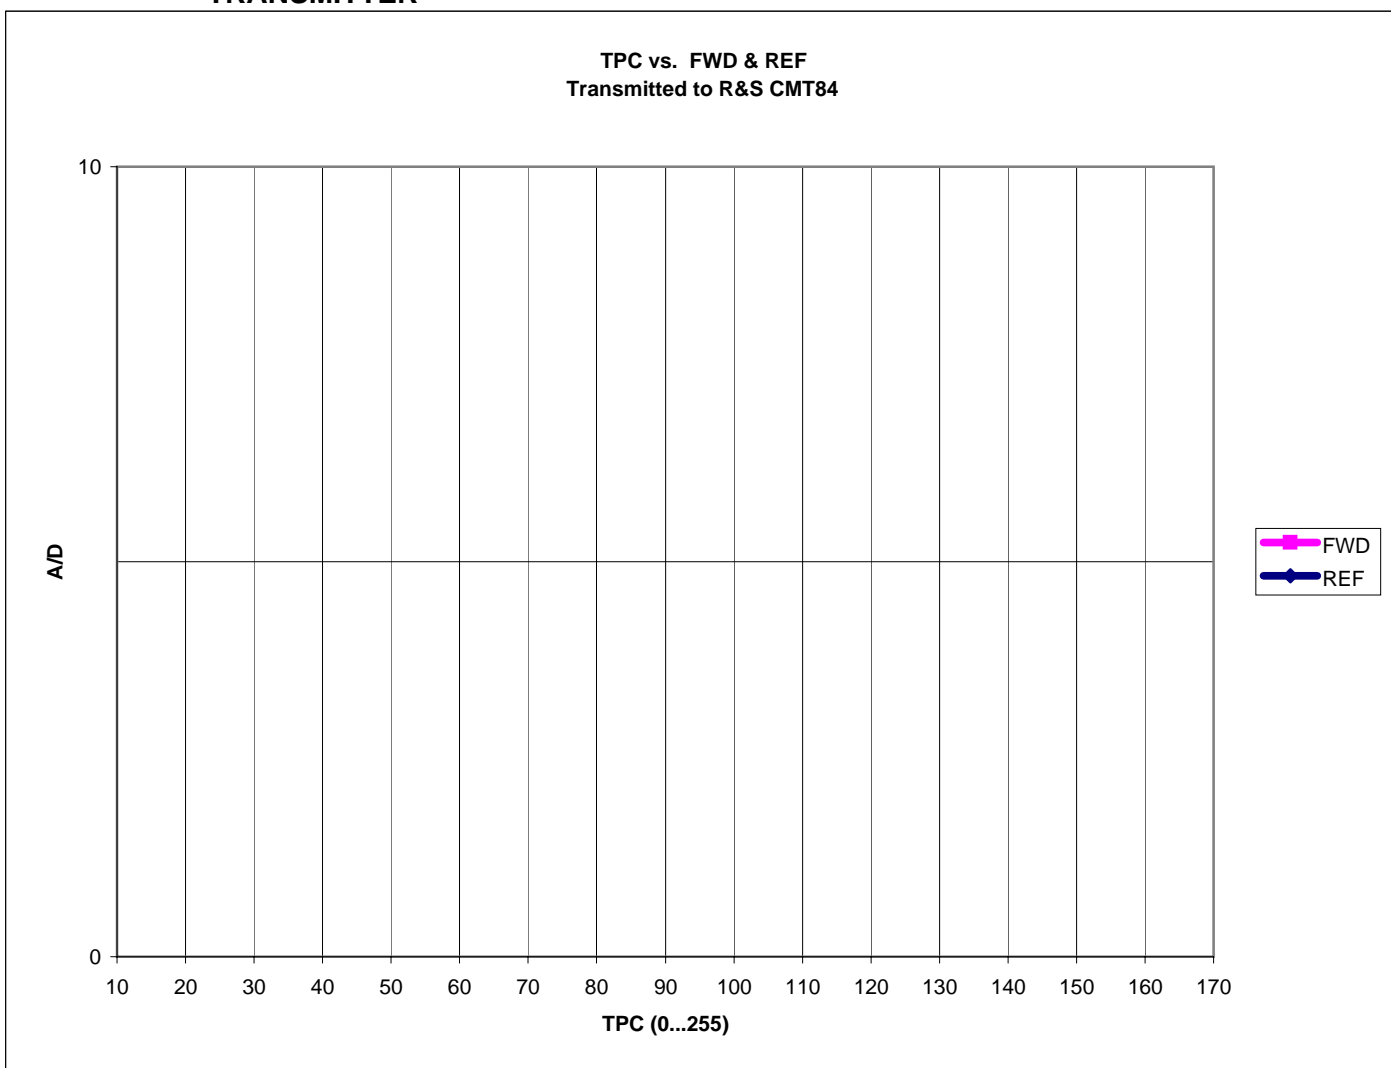

TRANSMITTER

TPC-value	POWER	Current	FWD-value	REF-value
A/D 0...255	Watts	Amps.	A/D 0...255	A/D 0...255
TPC	WATTS	WATTS	FWD	REF
20				
25				
30				
35				
40				
45				
50				
55				
60				
65				
70				
75				
80				
85				
90				
95				
100				
105				
110				
115				
120				
125				
130				
135				
140				
145				
150				
155				
160				
165				
170				
175				
180				
185				
190				
195				
200				
205				
210				
215				
220				
225				
230				
235				
240				
245				
250				
255				

